



No Hassle Compression

CC25 - 25 HP

DISCHARGE PRESSURE

SUCTION	DISCHARGE PRESSURE						
	60	80	100	120	140	160	180
2	134	133	132	130	129	127	125
5	158	157	156	155	154	152	145
10	202	202	200	198	196	194	192

CC40 - 40 HP

DISCHARGE PRESSURE

SUCTION	DISCHARGE PRESSURE										
	60	80	100	120	140	160	180	200	220	240	250
5	330	330	294	290	286	250	216	210	195	188	184
10	420	420	325	325	320	275	270	242	218	210	210
20	540	540	470	450	355	352	350	295	280	250	250
30	610	610	610	545	470	400	320	315	310	290	285
40		590	590	590	500	490	400	400	400	365	350
50		695	695	695	600	585	480	475	400	400	375
60			700	700	700	700	550	550	460	455	450
70			800	800	800	795	650	645	530	525	520

CC75 - 75 HP

DISCHARGE PRESSURE

SUCTION	DISCHARGE PRESSURE										
	60	80	100	120	140	160	180	200	220	240	250
5	740	620	615	540	535	440	435	420	390	380	375
10	780	780	685	570	570	565	560	470	430	415	410
20	830	830	830	700	690	580	570	570	540	495	490
30		820	820	820	780	770	650	640	510	580	560
40			930	930	930	810	800	650	640	600	570
50				970	970	970	960	770	760	750	710
60					900	900	900	880	880		
70						1025	1025	1025	1010		

CC100 - 100 HP

DISCHARGE PRESSURE

SUCTION	DISCHARGE PRESSURE										
	60	80	100	120	140	160	180	200	220	240	250
5	940	787	781	686	679	559	552	533	495	483	476
10	991	991	870	724	724	718	711	597	546	527	521
20	1054	1054	1054	889	876	737	724	724	686	629	622
30		1041	1041	1041	991	978	826	813	648	737	711
40			1181	1181	1181	1029	1016	826	813	762	724
50				1232	1232	1232	1219	978	965	953	902
60					1143	1143	1143	1118	1100	1080	1060
70						1302	1302	1302	1283	1250	1230

• Pressures in PSI • Flow Rates in MSCFD • Ratio VI: Low Vi High Vi

*Performance based on 2500 ft, gas density .665, temp 68 °F using Enduro G-2 V2 Selector Program


Flexible - Field changeable VI and compressor speed.

Reliable - Industry standard process components.

Economical - Low acquisition, installation and maintenance costs.

Portable - Moved with a 3/4 ton truck.

Operator Friendly - Simple controls grouped in one place.

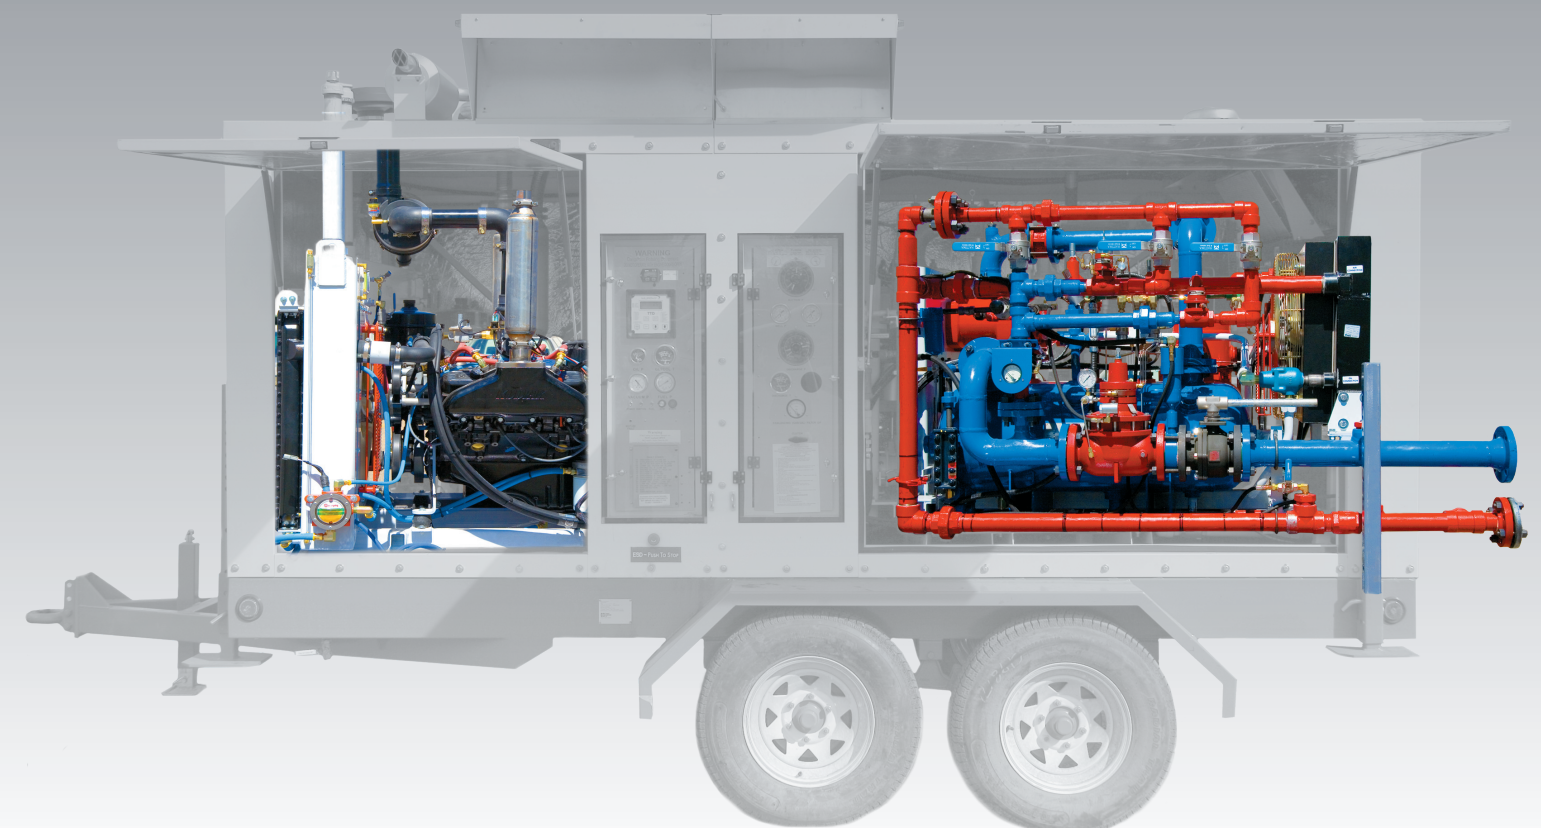

Phone: (403) 219-3026
Fax: (403) 717-1759

#8, 1820 - 30th Ave. NE
Calgary, Alberta Canada T2E 7M5

info@compactcompression.com

- Four Standard Packages •
- Ready to Run •

- Fully Equipped •
- 25-100 HP •



CC25

Standard Features

Compressor – Gardner Denver Enduro 6
 Driver – Teco 3000
 Weight – 4,200 lbs

Options

- Sound Proofing
- Metering
- Scada Output




CC40

Standard Features

Compressor – Gardner Denver Enduro 12
 Driver – Teco 3000
 Weight – 5,200 lbs

Options

- Blow Cases
- Sound Proofing
- Metering
- Scada Output

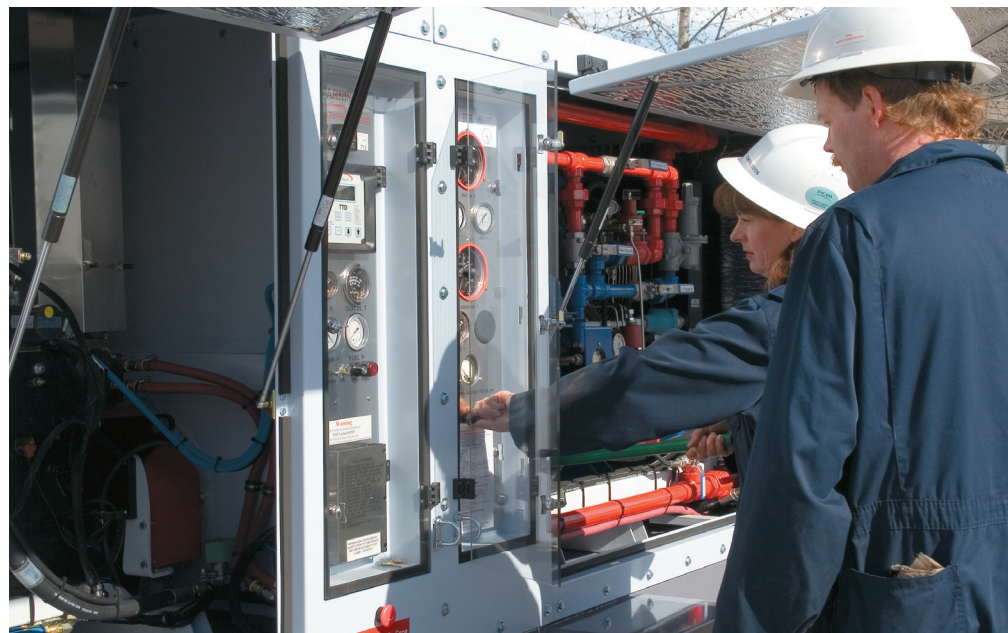

CC75

Standard Features

Compressor – Gardner Denver Enduro 25
 Driver – Teco 5700
 Weight – 7,500 lbs

Options

- Blow Cases
- Sound Proofing
- Metering
- Scada Output



CC100

Standard Features

Compressor – Gardner Denver Enduro 25
 Driver – Teco 8100
 Weight – 8,000 lbs

Options

- Blow Cases
- Sound Proofing
- Metering
- Scada Output